

# Exhibit 6



US01084885B2

(12) **United States Patent**  
**Lambourne**

(10) **Patent No.:** **US 10,848,885 B2**

(45) **Date of Patent:** **\*Nov. 24, 2020**

(54) **ZONE SCENE MANAGEMENT**

(56) **References Cited**

(71) Applicant: **SONOS, INC.**, Santa Barbara, CA (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Robert A. Lambourne**, Santa Barbara, CA (US)

3,956,591 A 5/1976 Gates, Jr.  
4,105,974 A 8/1978 Rogers  
(Continued)

(73) Assignee: **Sonos, Inc.**, Santa Barbara, CA (US)

FOREIGN PATENT DOCUMENTS

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

CA 2320451 A1 3/2001  
CN 1598767 A 3/2005  
(Continued)

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

(21) Appl. No.: **16/383,561**

Yamaha DME Designer 3.5 user manual (Year: 2004).\*

(22) Filed: **Apr. 12, 2019**

(Continued)

(65) **Prior Publication Data**

*Primary Examiner* — Paul C McCord

US 2019/0239008 A1 Aug. 1, 2019

**Related U.S. Application Data**

(57) **ABSTRACT**

(63) Continuation of application No. 15/130,919, filed on Apr. 15, 2016, which is a continuation of application (Continued)


(51) **Int. Cl.**  
**G06F 17/00** (2019.01)  
**H04R 27/00** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **H04R 27/00** (2013.01); **G05B 15/02** (2013.01); **G06F 3/0482** (2013.01);  
(Continued)

(58) **Field of Classification Search**  
CPC .... H04R 27/00; H04R 3/12; H04R 2227/005;  
H04R 2430/01; G05B 15/02;  
(Continued)

An example playback device in a first zone of a media playback system receives a first indication that the first zone has been added to a first zone scene including a first preconfigured grouping of zones including the first zone and a second zone. The playback device receives a second indication that the first zone has been added to a second zone scene including a second preconfigured grouping of zones including the first zone and a third zone. After a given one of the first and second zone scenes has been selected for invocation, the playback device receives an instruction to operate in accordance with the given zone scene, and based on the instruction, begins operating in accordance with the given zone scene such that the playback device is configured to play back audio in synchrony with one or more other playback devices in the media playback system.

**20 Claims, 11 Drawing Sheets**

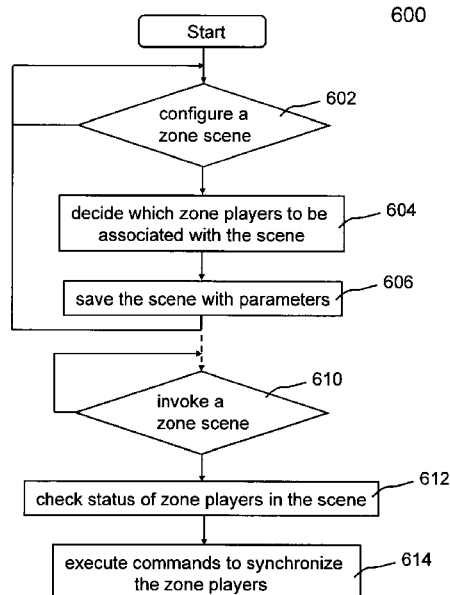

US 10,848,885 B2

7

The scroll wheel **250** is used for selecting an item within a list, whenever a list is presented on the screen **242**. When the items in the list are too many to be accommodated in one screen display, a scroll indicator such as a scroll bar or a scroll arrow is displayed beside the list. When the scroll indicator is displayed, a user may rotate the scroll wheel **250** to either choose a displayed item or display a hidden item in the list. The “ok” button **252** is used to confirm the user selection on the screen **242**.

There are three transport buttons **254**, which are used to control the effect of the currently playing song. For example, the functions of the transport buttons may include play/pause and forward/rewind a song, move forward to a next song track, or move backward to a previous track. According to one embodiment, pressing one of the volume control buttons such as the mute button **262** or the volume up/down button **264** activates a volume panel. In addition, there are three soft buttons **266** that can be activated in accordance with the labels **268** on the screen **242**. It can be understood that, in a multi-zone system, there may be multiple audio sources being played respectively in more than one zone players. The music transport functions described herein shall apply selectively to one of the sources when a corresponding one of the zone players or zone groups is selected.

FIG. 2C illustrates an internal functional block diagram of an exemplary controller **270**, which may correspond to the controller **240** of FIG. 2B. The screen **272** on the controller **270** may be a LCD screen. The screen **272** communicates with and is commanded by a screen driver **274** that is controlled by a microcontroller (e.g., a processor) **276**. The memory **282** may be loaded with one or more application modules **284** that can be executed by the microcontroller **276** with or without a user input via the user interface **278** to achieve desired tasks. In one embodiment, an application module is configured to facilitate grouping a number of selected zone players into a zone group and synchronizing the zone players for one audio source. In another embodiment, an application module is configured to control together the audio volumes of the zone players in a zone group. In operation, when the microcontroller **276** executes one of the application modules **284**, the screen driver **274** generates control signals to drive the screen **272** to display an application specific user interface accordingly, more of which will be described below.

The controller **270** includes a network interface **280** referred to as a RF interface **280** that facilitates wireless communication with a zone player via a corresponding RF interface thereof. In one embodiment, the commands such as volume control and audio playback synchronization are sent via the RF interfaces. In another embodiment, a saved zone group configuration is transmitted between a zone player and a controller via the RF interfaces. The controller **270** may control one or more zone players, such as **102**, **104** and **106** of FIG. 1. Nevertheless, there may be more than one controllers, each preferably in a zone (e.g., a room) and configured to control any one and all of the zone players.

In one embodiment, a user creates a zone group including at least two zone players from the controller **240** that sends signals or data to one of the zone players. As all the zone players are coupled on a network, the received signals in one zone player can cause other zone players in the group to be synchronized so that all the zone players in the group playback an identical audio source or a list of identical audio sources in a timely synchronized manner. Similarly, when a user increases the audio volume of the group from the controller, the signals or data of increasing the audio volume

8

for the group are sent to one of the zone players and causes other zone players in the group to be increased together in volume and in scale.

According to one implementation, an application module is loaded in memory **282** for zone group management. When a predetermined key (e.g. the “zones” button **244**) is activated on the controller **240**, the application module is executed in the microcontroller **276**. The input interface **278** coupled to and controlled by the microcontroller **276** receives inputs from a user. A “Zone Menu” is then displayed on the screen **272**. The user may start grouping zone players into a zone group by activating a “Link Zones” or “Add Zone” soft button, or de-grouping a zone group by activating an “Unlink Zones” or “Drop Zone” button. The detail of the zone group manipulation will be further discussed below.

As described above, the input interface **278** includes a number of function buttons as well as a screen graphical user interface. It should be pointed out that the controller **240** in FIG. 2B is not the only controlling device that may practice the present invention. Other devices that provide the equivalent control functions (e.g., a computing device, a hand-held device) may also be configured to practice the present invention. In the above description, unless otherwise specifically described, it is clear that keys or buttons are generally referred to as either the physical buttons or soft buttons, enabling a user to enter a command or data.

One mechanism for ‘joining’ zone players together for music playback is to link a number of zone players together to form a group. To link a number of zone players together, a user may manually link each zone player or room one after the other. For example, there is a multi-zone system that includes the following zones.

- Bathroom
- Bedroom
- Den
- Dining Room
- Family Room
- Foyer

If the user wishes to link 5 of the 6 zone players using the current mechanism, he/she must start with a single zone and then manually link each zone to that zone. This mechanism may be sometimes quite time consuming. According to one embodiment, a set of zones can be dynamically linked together using one command. Using what is referred to herein as a theme or a zone scene, zones can be configured in a particular scene (e.g., morning, afternoon, or garden), where a predefined zone grouping and setting of attributes for the grouping are automatically effectuated.

For instance, a “Morning” zone scene/configuration command would link the Bedroom, Den and Dining Room together in one action. Without this single command, the user would need to manually and individually link each zone. FIG. 3A provides an illustration of one zone scene, where the left column shows the starting zone grouping—all zones are separate, the column on the right shows the effects of grouping the zones to make a group of 3 zones named after “Morning”.

Expanding this idea further, a Zone Scene can be set to create multiple sets of linked zones. For example, a scene creates 3 separate groups of zones, the downstairs zones would be linked together, the upstairs zones would be linked together in their own group, and the outside zones (in this case the patio) would move into a group of its own.